
GL250 Drop Down Loft Access Door

Hinge Blocker Locations

Blocker Location

The green hinge blockers locate into the two outer hinge recesses of the four as shown here.

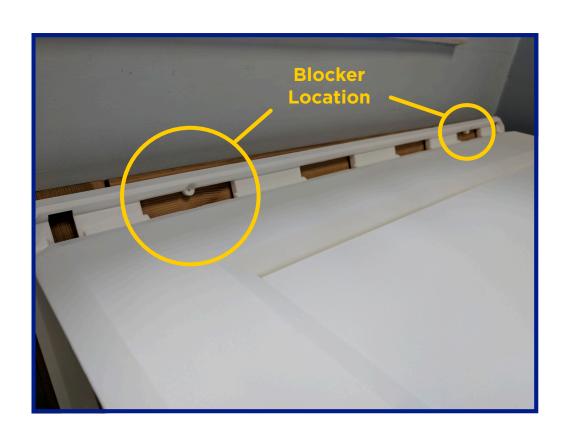

Clip Ladges Fixing Boss

Location Features

The two outer recesses each have a screw boss located in the centre. There are also two small clip ledges, one either side of the boss.




GL250 Drop Down Loft Access Door

Hinge Blocker Locations

Blocker Orientation

The hole in the green blockers will align with the fixing boss and the two wedge shaped clips with align with the ledges.

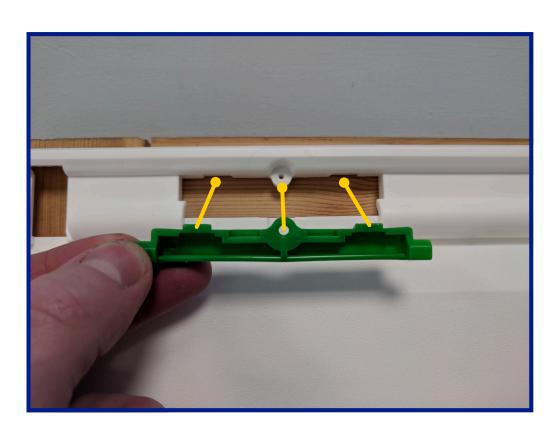

Outer Tab Engaged Clip

Fitted Blocker

When pressed into the recess the wedge shaped clips will click into place and the two outer tabs will stop it from pushing in too far.




GL250 Drop Down Loft Access Door

Hinge Blocker Locations

Screw Fitting

The retaining screw can then be fed through the hole in the green blocker and fixed into the boss on the frame.

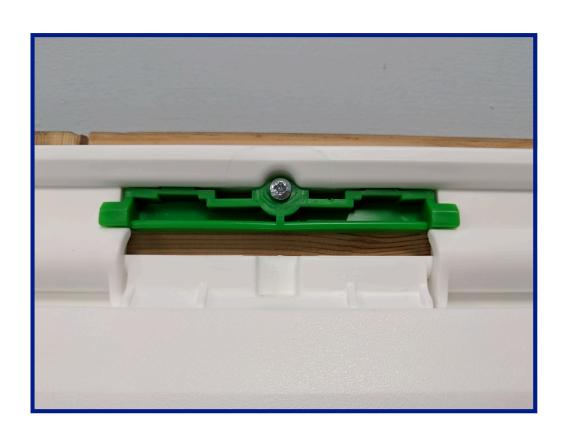

Installed Blockers

Once installed the blockers will prevent the door panel from being removed from the frame.

To remove the door, the blockers must first be removed.

