

Roll-Out Dry Ridge System - Batten Support Bracket

CODE **GDRR-BS**

Product Codes:

Support Bracket	GDRR-BS
------------------------	----------------



Description

Made from galvanised steel, the batten support bracket provides a steady, secure platform for the horizontal ridge batten at the apex of truss rafters.


The brackets have different bend points to accommodate a range of roof pitches and tile heights and are designed to hold a length of 25 x 50mm batten. One bracket should be placed at the apex of each rafter along the ridge.

The bracket should be secured to the truss rafter through the nail holes on each of the two legs. At least two nails should be used on each leg of the bracket, these must be stainless steel annular ring shanked nails at a length of 30mm.

The batten support bracket forms part of Manthorpe's dry ridge systems which can be purchased as a kit, with all the parts required to cover a run of 3 or 6 metres.

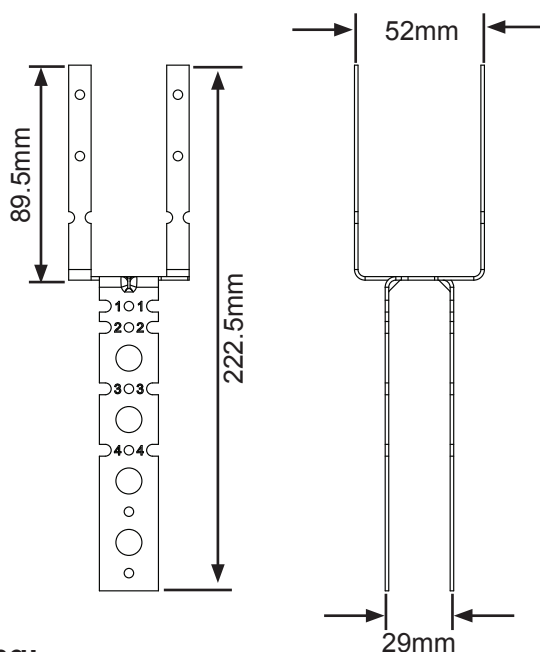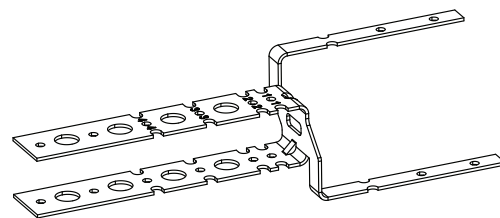

Fixing:

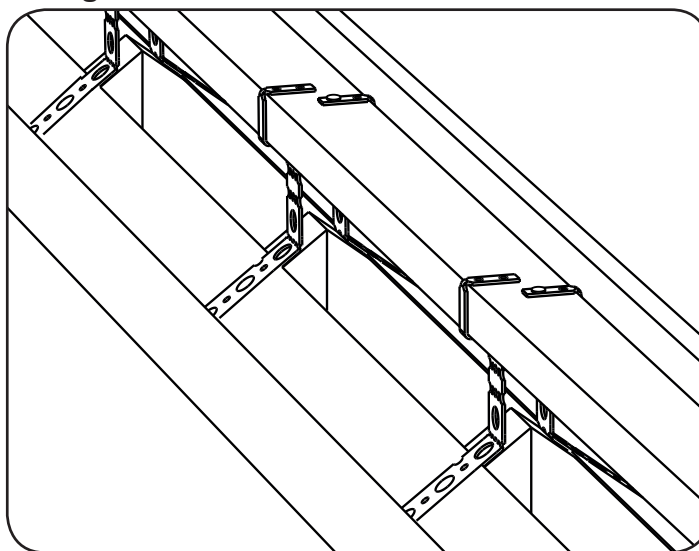

Packing Details	6M kit: 10 brackets 3M kit: 5 brackets
Weight	0.093 kg each
Materials	Galvanized steel (BS EN 10346)
Manufacturing Process	Pressed

References

BSI: BS 5534
BSI: BS EN 1991-1-4
BSI: BS 8612:2018
NHBC Standards Chapter 7.2

BS 8612 Specifications

- Performance data for the tests conducted on this product is available upon request.
- Independently tested to conform with the requirements of BS 8612.

MANTHORPE BUILDING PRODUCTS LTD
MANTHORPE HOUSE
BRITAIN DRIVE
CODNOR GATE BUSINESS PARK
RIPLEY
DERBYSHIRE DE5 3ND

TEL: 01773 303 000
FAX: 01773 303 300
EMAIL:
mbp.care@manthorpe.co.uk
WEB
www.manthorpebp.co.uk

DRN K.B. Date 20.06.19

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No

MBP 8319

Issue

C