
# Manthorpe Building Products

#### **Product Information Sheet**

## **BRICKWORK CAVITY TRAY DIMENSIONS**

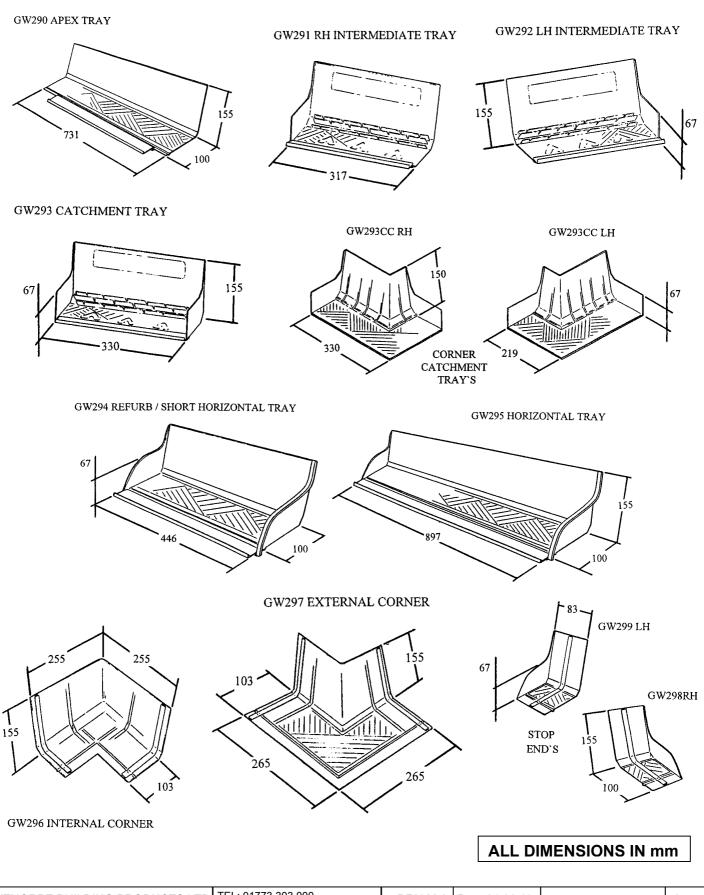

MANTHORPE BUILDING PRODUCTS LTD MANTHORPE HOUSE BRITTAIN DRIVE

CODNOR GATE BUSINESS PARK RIPLEY

DERBYSHIRE DE5 3ND

TEL: 01773 303 000

FAX: 01773 303 300

EMAIL:

mbp.care@manthorpebp.co.uk
WEB:
www.manthorpebp.co.uk

DRN M.A

without notice.

Date 21.06.19


The company maintains a policy of continuous development of its product range and reserves the right to amend the specification


DRG No

Issue


**MBP 8043** 

## STEPPED CAVITY TRAY SYSTEM






2) GW292 LH INTERMEDIATE TRAY



NOTE: - SHORT LEADED TRAY DETAIL SHOWN AND MORTAR IS NOT SHOWN FOR CLARITY.

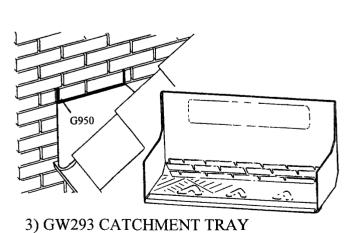

4) GW293CC LH CORNER CATCHMENT TRAY

G950 WEEP VENT

MANTHORPE BUILDING PRODUCTS LTD MANTHORPE HOUSE BRITTAIN DRIVE

CODNOR GATE BUSINESS PARK RIPLEY

DERBYSHIRE DE5 3ND

TEL: 01773 303 000 FAX: 01773 303 300

**EMAIL** 

mbp.care@manthorpebp.co.uk

WEB:

www.manthorpebp.co.uk

DRN M.L.W.O

Date 24.06.19

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.


DRG No


Issue

**MBP 8120** 


## **HORIZONTAL CAVITY TRAY SYSTEM**


GW294 REFURBISHMENT / SHORT HORIZONTAL TRAY




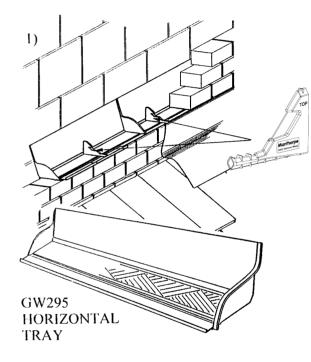





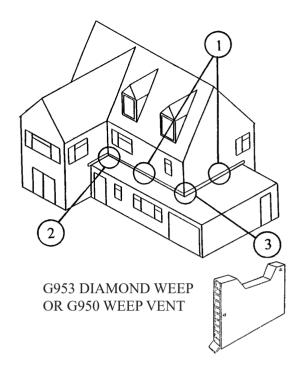





NOTE: - MORTAR IS NOT SHOWN FOR CLARITY.

MANTHORPE BUILDING PRODUCTS LTD MANTHORPE HOUSE

MANTHORPE HOUSE BRITTAIN DRIVE

RIPLEY DERBYSHIRE DE5 3ND

CODNOR GATE BUSINESS PARK

TEL: 01773 303 000

FAX: 01773 303 300

EMAIL:

mbp.care@manthorpebp.co.uk

WEB:

www.manthorpebp.co.uk

DRN M.L.W.O

Date:24.06.19


The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.


DRG No


Issue

**MBP 8121** 


## REFURBISHMENT HORIZONTAL CAVITY TRAY SYSTEM









#### 2) GW296 INTERNAL CORNER





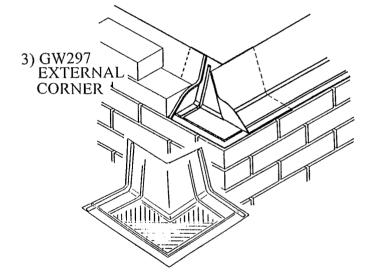

**GW299 STOP END** 



NOTE: - MORTAR IS NOT SHOWN FOR CLARITY.

MANTHORPE BUILDING PRODUCTS LTD MANTHORPE HOUSE **BRITTAIN DRIVE** 

CODNOR GATE BUSINESS PARK RIPI FY

DERBYSHIRE DE5 3ND

TEL: 01773 303 000 FAX: 01773 303 300

EMAIL:

mbp.care@manthorpebp.co.uk

WEB:

www.manthorpebp.co.uk

DRN M.L.W.O

Date 24.06.19

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No

Issue


**MBP 8121** 

# Manthorpe Building Products


# **Product Information Sheet**

TITLE GENERAL FITTING DETAIL UNLEADED TRAYS

CODE

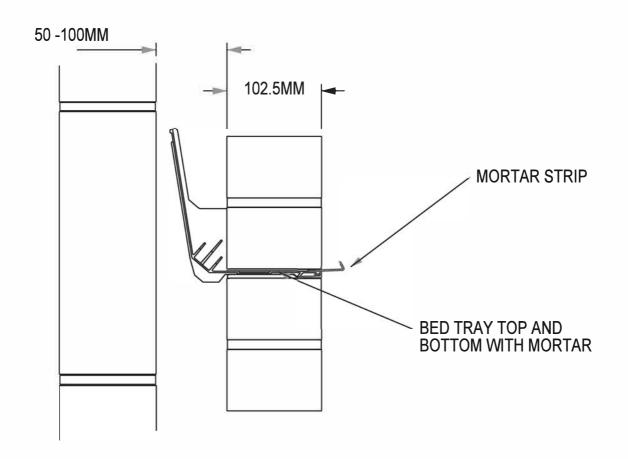

#### FITTING LEAD

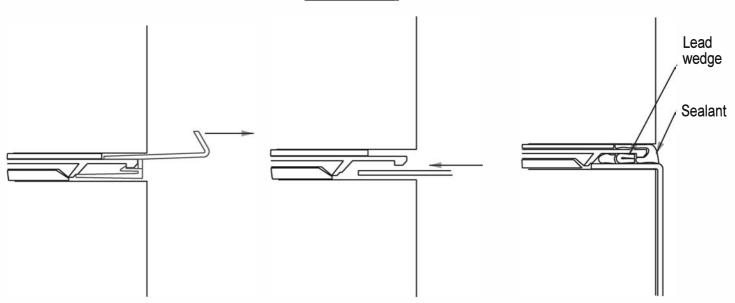

- Wait until mortar is dry and wall is stable then pull out mortar stip to leave a 25mm slot
- Push lead into the gap ensuring it fits under the Cavity Tray. Secure lead flashing using lead wedges as per normal practice.
- Dress lead down into position and point with a suitable flexible lead sealant.

For further information on the fitting and dressing of lead refer to the 'Lead Sheet Manual' available from the Lead Sheet Association.

MANTHORPE BUILDING PRODUCTS LIMITED MANTHORPE HOUSE, BRITTAIN DRIVE, CODNOR GATE BUSINESS PARK, RIPLEY, DERBYSHIRE DE5 3ND.

TELE: 01773 303 000 FAX: 01773 303 300

mbp.care@manthorpebp.co.uk Web: www.manthorpebp.co.uk Dm MC

Date

The Company maintains a policy of continuous

development of its product range and reserve the right to amend the specification without notice.

21/06/19

DRG No

ISSUE


8046

# Manthorpe Building Products

## **Product Information Sheet**

TITLE DIFFERENT LEAD TYPES CODE

Depending upon the application different sizes of lead should be used

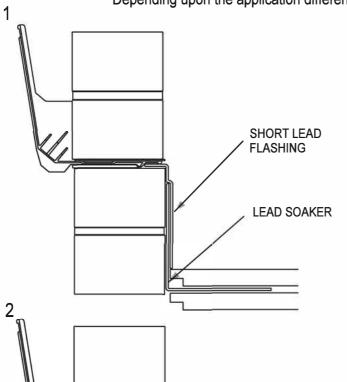

For general details and normal exposure areas code 4 lead is recommended. For severe exposure areas code 5 lead is recommended

Fig. 1 shows a typical abutment situation using lead soakers.




Fig. 2 shown an abutment flashing and secret gutter detail. Secret gutters are traditionally made from lead but are now more commonly bought preformed in GRP.

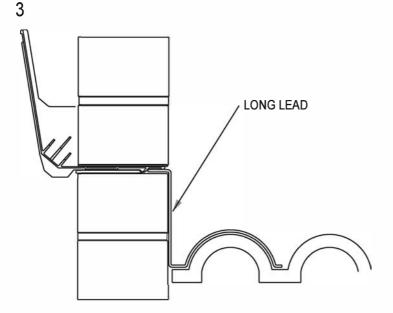


Fig. 3 shows a long lead application. In this detail the lead is dressed over the tile in one continuous piece then moulded into the contours of the tile. This type of flashing should only be used on contoured roof finishes.

FOR FURTHER TECHNICAL INFORMATION ON THE FITTING OF LEAD SHEET REFER TO

THE LEAD SHEET MANUAL
Available from
LEAD SHEET ASSOCIATION

MANTHORPE BUILDING PRODUCTS LTD MANTHORPE HOUSE, BRITTAIN DRIVE, CODNOR GATE BUSINESS PARK, RIPLEY, DERBYSHIRE DE5 3ND. TELE: 01773 303 000 FAX: 01773 303 300 Email: mbp.care@manthorpebp.co.uk

www.manthorpebp.co.uk

uk

Drn MC

Date 21/06/2019

The Company maintains a policy of continuous development of its product range and reserve the right to amend the specification without notice.

DRG No ISSUE