

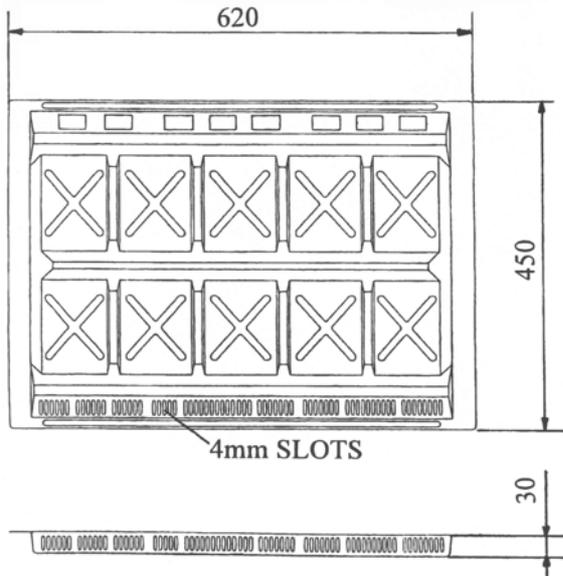


Cross Flow Fly Screen Eaves Panel Ventilator

CODE **G605**

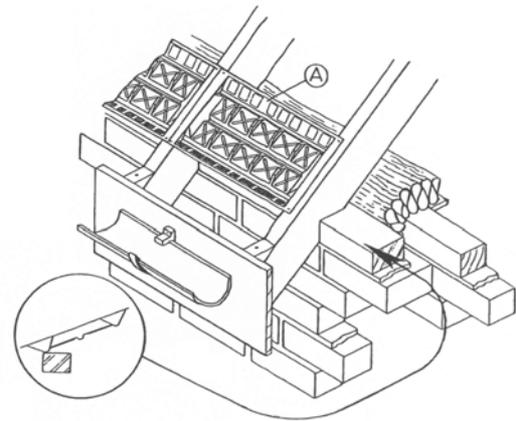

6000mm² AIRFLOW PER PANEL

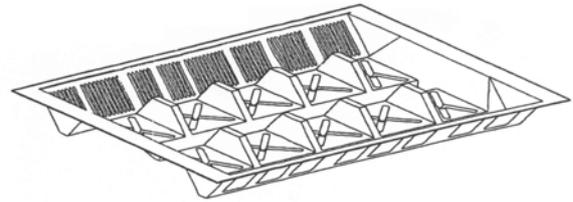

Description:

The G605 Cross Flow Fly Screen Panel is designed for open eaves or cottage style situations and to provide a clear air passage between the roofs felt and loft insulation.

The fly screen section consists of evenly punched slots specifically designed to prohibit entrance of large insects but wide enough not to be blocked by debris, paint or water droplets (see BS5250 section 6)

The G605 is suitable for 600mm rafter centres 400mm and 450mm versions are also available.

Fitting Instructions:

The G605 Cross Flow Fly Screen Eaves Panel (A) should be positioned with the section over lapping the external brick course and either nailed or stapled to the rafters ensuring that the loft insulation is firmly tucked into the eaves as shown.

In certain low pitch situations an additional G500 Roll Panel will be required to ensure a clear air path over the insulation into the roof space.

Use in conjunction with other products from the Manthorpe range to provide a complete roof ventilation system.

COLOURS	Black
PACKING DETAILS	50 Panels per box
WEIGHT	7.2kg per box
MATERIAL	Lightweight Rigid PVC
MANUFACTURING PROCESS	Vacuum Formed
FREE AIRFLOW	10,000mm ² /M equivalent to a continuous gap of 10mm

References:

BRE: DIGEST 262/270
 BSI: BS5250
 DOE: Building Regs F2
 NHBC: Good Practice Guide
 NHBC: Standards 7.2

MANTHORPE BUILDING PRODUCTS LTD
 MANTHORPE HOUSE
 BRITAIN DRIVE
 CODNOR GATE BUSINESS PARK
 RIPLEY
 DERBYSHIRE DE5 3ND

TEL: 01773 303 000
 FAX: 01773 303 300
 EMAIL: mbp.care@manthorpebp.co.uk
 WEB: www.manthorpebp.co.uk

DRN M.A Date 20.06.19

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No

MBP 8020

Issue

B