



Cross Flow Fly Screen Eaves Panel Ventilator

CODE **G625**

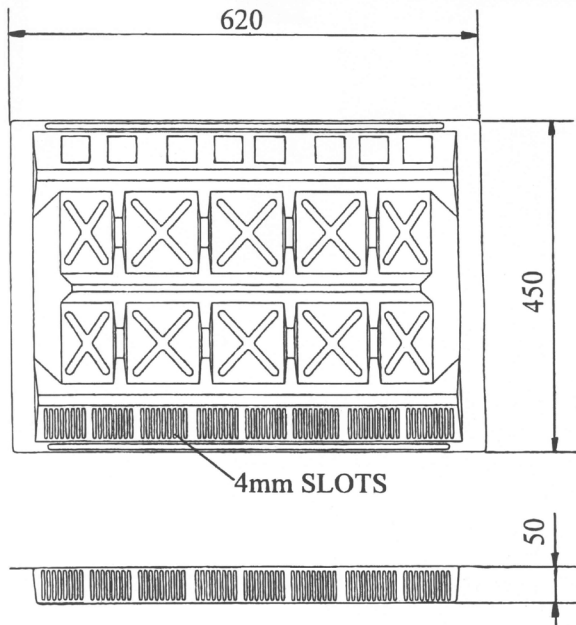

15,000mm² AIRFLOW PER PANEL

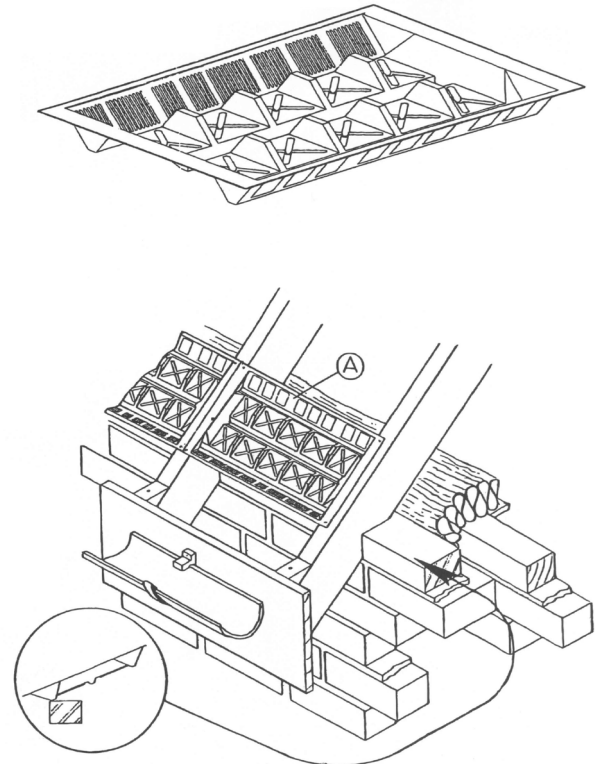

Description:

The G625 Cross Flow Fly Screen Panel is designed for open eaves or cottage style situations and to provide a clear air passage between the roofs felt and loft insulation.

The fly screen section consists of evenly punched slots specifically designed to prohibit entrance of large insects but wide enough not to be blocked by debris, paint or water droplets (see BS5250 section 6)

The G625 is suitable for 600mm rafter centres and where 25mm of airflow is required.

Fitting Instructions:

The G625 Cross Flow Fly Screen Eaves Panel (A) should be positioned with the section over lapping the external brick course and either nailed or stapled to the rafters ensuring that the loft insulation is firmly tucked into the eaves as shown.

In certain low pitch situations an additional G500 Roll Panel will be required to ensure a clear air path over the insulation into the roof space.

Use in conjunction with other products from the Manthorpe range to provide a complete roof ventilation system.

COLOURS	Black
PACKING DETAILS	50 Panels per box
WEIGHT	9.6kg per box
MATERIAL	Lightweight Rigid PVC
MANUFACTURING PROCESS	Vacuum Formed
FREE AIRFLOW	25,000mm ² /M equivalent to a continuous gap of 25mm

References:

BRE:	DIGEST 262/270
BSI:	BS5250
DOE:	Building Regs F2
NHBC:	Good Practice Guide
NHBC:	Standards 7.2

MANTHORPE BUILDING PRODUCTS LTD
MANTHORPE HOUSE
BRITAIN DRIVE
CODNOR GATE BUSINESS PARK
RIPLEY
DERBYSHIRE DE5 3ND

TEL: 01773 303 000
FAX: 01773 303 300
EMAIL: mbp.care@manthorpebp.co.uk
WEB: www.manthorpebp.co.uk

DRN M.A

Date 05.07.19

DRG No

Issue

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

MBP 8021

B