

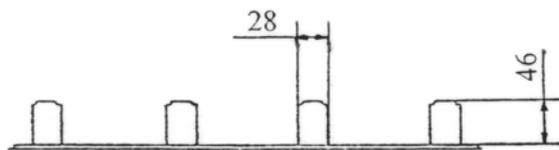
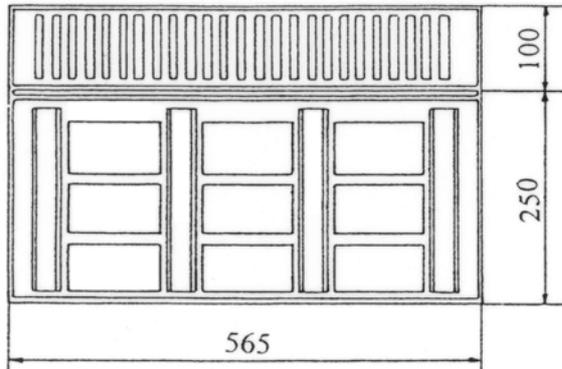


Refurbishment Eaves Ventilator

CODE **G645**

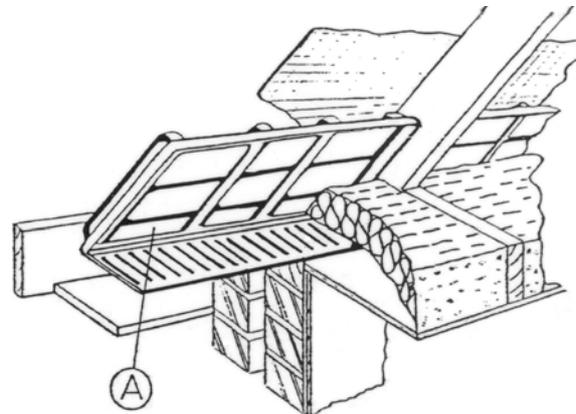

15,000mm² AIRFLOW PER PANEL

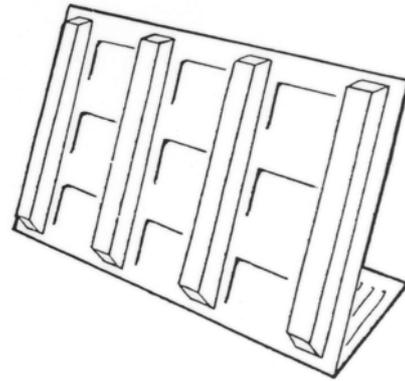

Description:

The G645 Refurbishment Eaves Ventilator is designed to be used in refurbishment situations and is fitted from inside the roof space to create a clear air gap between the loft insulation and felt, its flexible hinge enables it to achieve any roof pitch.

The G645 Refurbishment Eaves Ventilator Panel is for 600mm rafter centres a 400mm version is also available.

Fitting Instructions:

The G645 Refurbishment Panel (A) should be folded to achieve the desired roof pitch and pushed into the eaves detail. The loft insulation should be firmly tucked into the back of the refurbishment panel as shown.

Use in conjunction with other products from the Manthorpe range to provide a complete roof ventilation system.

COLOURS	Black
PACKING DETAILS	50 Panels per box
WEIGHT	6kg per box
MATERIAL	Lightweight Rigid PVC
MANUFACTURING PROCESS	Vacuum Formed
FREE AIRFLOW	25,000mm ² /M equivalent to a continuous gap of 25mm

References:

BRE : DIGEST 262/270
 BSI : BS5250
 DOE : Building Regs F2
 NHBC : Good Practice Guide
 NHBC : Standards 7.2

MANTHORPE BUILDING PRODUCTS LTD
 MANTHORPE HOUSE
 BRITAIN DRIVE
 CODNOR GATE BUSINESS PARK
 RIPLEY
 DERBYSHIRE DE5 3ND

TEL: 01773 303 000
 FAX: 01773 303 300
 EMAIL: mbp.care@manthorpebp.co.uk
 WEB: www.manthorpebp.co.uk

DRN M.A Date 20.06.19

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No

MBP 8023

Issue

B