

SmartVerge® Linear Dry Verge System - Rigid Sarking

CODE **GLV**


Description:

Roofing practice in Scotland and some parts of Northern England includes the use of rigid or semi-rigid boarding or sarking with counterbattens fitted directly above the rafters.

The Manthorpe SmartVerge® Linear Dry Verge System can be installed in all of the above details provided that the thickness of the verge does not exceed **100mm** (See Fig 1).

N.B. The thickness of the verge should be measured from bottom of the fixing batten (where applicable) to the highest point of the slates/tiles (See Fig 1).

Fig 1.

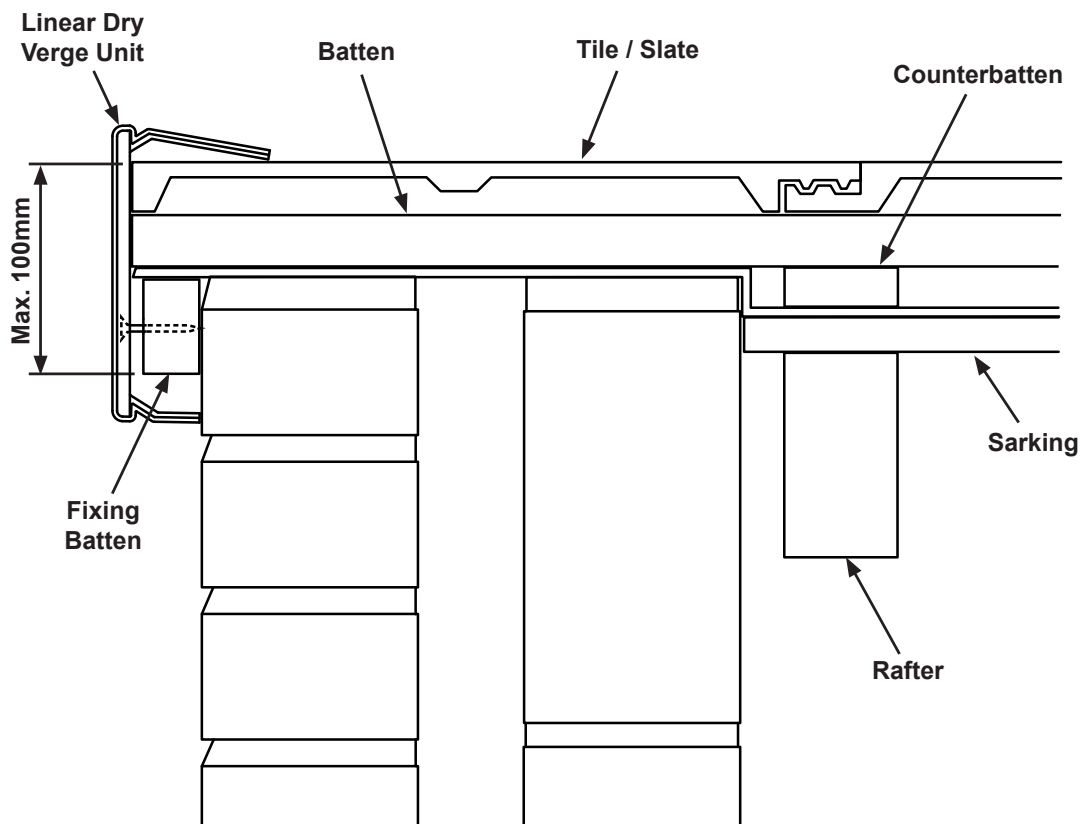

References:

BSI: British Standard 5534:2003
 BSI: British Standard 6399-2:1997
 NHBC Standards Chapter 7.2

MANTHORPE BUILDING PRODUCTS LTD
 MANTHORPE HOUSE
 BRITAIN DRIVE
 CODNOR GATE BUSINESS PARK
 RIPLEY
 DERBYSHIRE DE5 3ND

TEL: 01773 303 000
 FAX: 01773 303 300
 EMAIL:
 mbp.care@manthorpebp.co.uk
 WEB
 www.manthorpebp.co.uk

DRN R.P Date 26.06.19

DRG No

Issue

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

MBP 8256

B