
Manthorpe Building Products

Product Information Sheet

Roll-Out Dry Ridge System - Ridge Union

CODE GDRR-RU

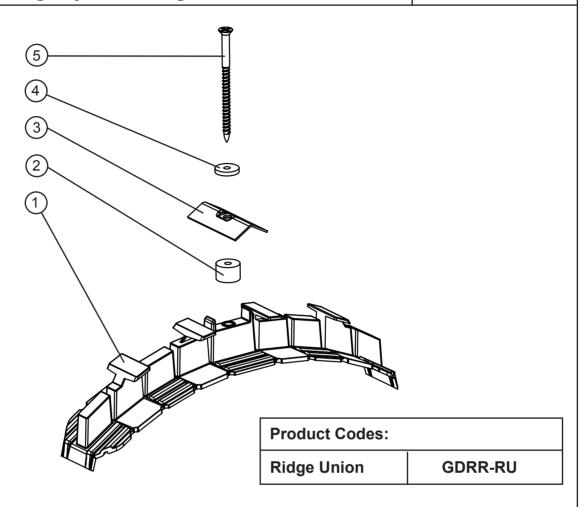

Description

The Ridge Union is made up of an assembly of parts, as shown in the diagram. The parts are as follows:

- 1.Ridge Union Body, injection moulded in UV stabilised polypropylene
- 2. Foam Washer, made from expanded polyethylene
- 3.Clamp, made from 304 grade stainless steel
- 4. Neoprene Rubber Washer
- 5. Countersunk Screw, made from 304 grade stainless steel

The Ridge Union is designed to sit in the gaps between each of the ridge tiles, holding them in place. The product slides onto the end of the ridge tile and is flexible so that it bends to the shape of the tile, both round and angled, and then the next ridge tile slots into the other side of the Ridge Union and this continues along the full length of the ridge. Once the ridge tiles are all correctly rested in place, the unions are secured by driving the countersunk screw, assembled with the washers and clamp, through the hole in the top and into the horizontal batten below. The screws should be tightened down so that the clamp presses down on the ridge tile securing it in position.

The Ridge Union forms part of Manthorpe's Dry Ridge System which can be purchased as a kit, with all the parts required to cover a run of approximately 6 metres.

MANTHORPE BUILDING PRODUCTS LTD MANTHORPE HOUSE

BRITTAIN DRIVE CODNOR GATE BUSINESS PARK

RIPLEY

DERBYSHIRE DE5 3ND

TEL: 01773 303 000 FAX: 01773 303 300

EMAIL:

mbp.care@manthorpebp.co.uk WFB

www.manthorpebp.co.uk

DRN K.B.

Date 26.06.19

DRG No

Issue

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

MBP 8266 PAGE (1 OF 2)


F


Manthorpe Building Products


Product Information Sheet

Roll-Out Dry Ridge System - Ridge Union


CODE GDRR-RU

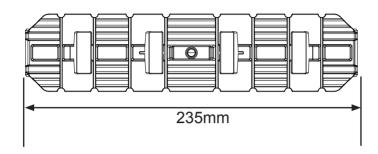

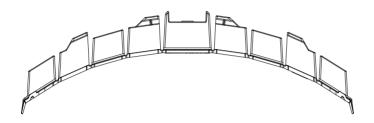



Fixing:

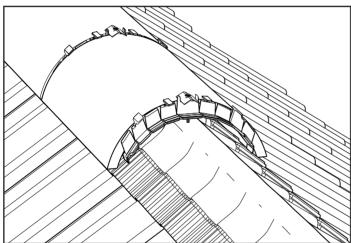

	\	
//\		

References

BSI: British Standard 5534:2003 British Standard 6399-2:1997 BSI: BSI: British Standard 8612:2018 NHBC Standards Chapter 7.2

Roof Pitch Compatability	15° to 45° Pitch	
Weight	0.066 kg each	
Packaging	13 per roll-out system 12 per additional pack	
Materials	UV Stabalised Polypropylene	
Manufacturing Process	Injection moulded	
Colour Variations	Black (BL)	

BS 8612 Specifications

- Independently tested to conform with the requirements of BS 8612.
- Performance data for the tests conducted on this product is available upon request.

MANTHORPE BUILDING PRODUCTS LTD

MANTHORPE HOUSE **BRITTAIN DRIVE**

CODNOR GATE BUSINESS PARK

RIPLEY

DERBYSHIRE DE5 3ND TEL: 01773 303 000 FAX: 01773 303 300

EMAIL:

mbp.care@manthorpebp.co.uk

www.manthorpebp.co.uk

DRN K.B.

Date 26.06.19

DRG No

Issue

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

MBP 8266 PAGE (2 OF 2)

