

SmartVerge® Thin Leading Edge Dry Verge - System Overview

Code: **GPPV-TLE**


### Description

The SmartVerge® Thin Leading Edge dry verge system provides a neat and attractive finish to the verge detail of a roof covered with thin leading edge roof tiles. The design of the system is ambidextrous and allows the units to be installed to either hand of the verge; with the flanges designed to lay perfectly flat to the tile surface thanks to the unique split fixing plate, helping to eliminate tile kick up and increase the effective water runoff from the verge.


The system is mortar-free and can be fixed in all weather conditions, easily capping over each tile in succession and once fitted they are weatherproof and maintenance free. The verge units are available in a range of colours to compliment any variation of roof design.

Angled or round Ridge End Caps are available to protect the end of the ridge while the unique Eaves Closure with its simpler fitting and colour matched external fixing at the base of the verge, secures the first unit and prevents ingress into the roof space from birds and large insects.

### Ambidextrous Thin Leading Edge Dry Verge Unit (GPPV-TLE)

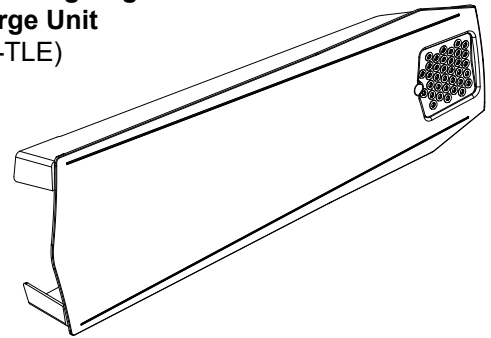


### Angled Ridge End Cap (GPPV-END-A)

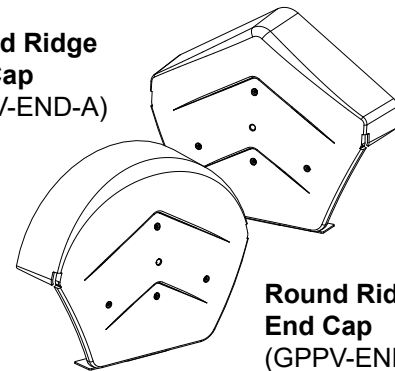

### Round Ridge End Cap (GPPV-END-R)


### Features

- Fast & easy to install, mortar-free, dry fix verge system.
- Suits large format interlocking thin leading edge tiles.
- Can be fitted with a batten gauge of 255mm to 345mm.
- Ambidextrous units suit both hands of the verge.
- Protects the verge from exposure to the elements.
- Also helps to prevent the entry of birds and large insects.
- Suitable for both new build and refurbishment details.
- Can be installed on roof pitches between 17.5° and 55°.
- Drains moisture away from the wall to prevent staining.
- Manufactured from UV stabilised polypropylene.
- Available in a range of colours to suit various roof types.
- Meets BS 5534 requirements for mechanical fixing.
- System independently wind tunnel tested at the BRE.

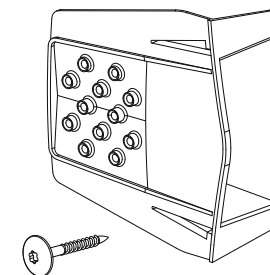

### Eaves Closure Unit (GPPV-IPEC)

### Batten End Clip (GDV-BEC)

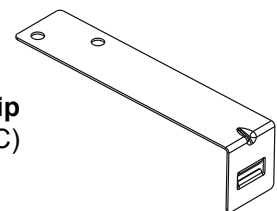

### References

BSI: BS 5534:2014 Code of Practice for Slating and Tiling  
 BRE: Wind Tunnel Test report number P123548-1000  
 BSI: BS 8612:2018  
 NHBC: Standards - Chapter 7.2 Pitched Roofs

### BS 8612 Specifications

- Independently tested to conform with the requirements of BS 8612.
- Performance data for the tests conducted on this product is available upon request.

MANTHORPE BUILDING PRODUCTS LTD  
 MANTHORPE HOUSE  
 BRITAIN DRIVE  
 CODNOR GATE BUSINESS PARK  
 RIPLEY  
 DERBYSHIRE DE5 3ND

TEL: 01773 303 000  
 FAX: 01773 303 300  
 EMAIL: mbp.care@manthorpebp.co.uk  
 WEB: www.manthorpebp.co.uk

DRAWN	ISSUE DRAWN
B.H. 11/01/24	B.H. 11/01/24

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No	Issue
<b>MBP 8389</b>	<b>01</b>