

Stacked Underfloor Ventilator

CODE **G966**

Description


The G966 Stacked Underfloor Void Ventilator is a telescopic ventilator providing twice the amount of airflow as a standard telescopic vent, to the underfloor void of a property.

The current and future requirements of part M of the building regulations for accessibility into and around a domestic property and modern architectural design has lead to the increasing demand for a double, stacked underfloor ventilator.

The G966 offers the house builder more opportunity and design freedom to create an accessible opening into the property, without jeopardising the amount of underfloor ventilation.

Like our G965 product, the G966 offers a vertical telescopic adjustment of between 5 and 8 brick courses without the need for an extension sleeve. The horizontal outlet is long enough to bridge through an overall wall thickness of 350mm without the need for an additional extension.

The front aperture of the G966 is designed for use with two G930 Combination Airbricks.

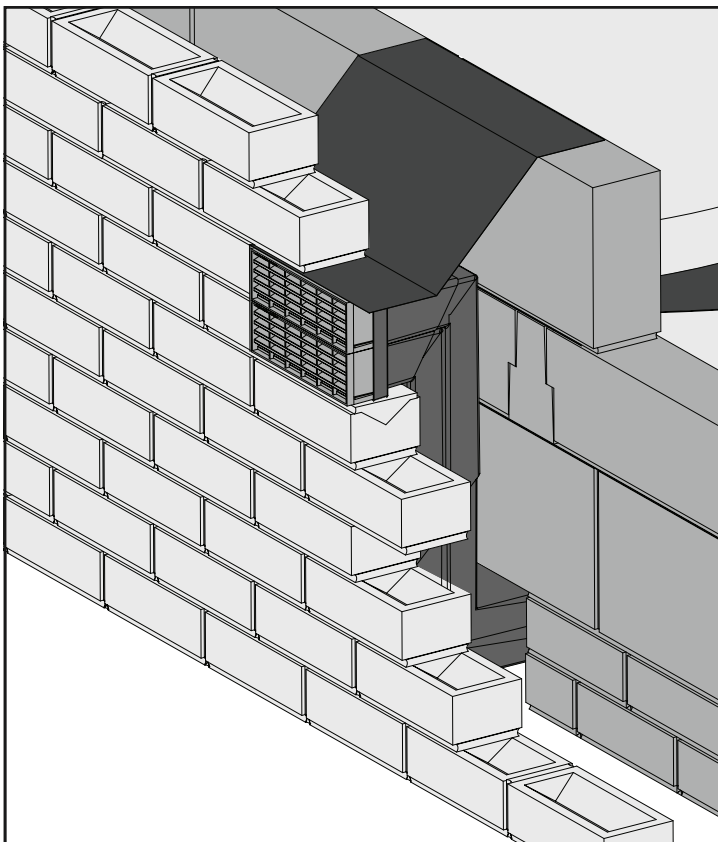

Colour	Brown / Terracotta / White / Buff / Grey / Blue Black
Packing Details	2 per box
Box Weight	3.5kg
Material	Polypropylene
Manufacturing Process	Injection Moulded
Free Airflow	12,900mm ²
Vertical Extension	5-8 courses (318mm - 575mm)
Horizontal Extension	414mm (Including G930 Airbrick)

References

BRE: DIGEST 17/262
 BRE: Floor, Flooring
 DOE: Building Regulations C4
 NHBC: Standards 5.2
 BSI: BS 5250:2002

MANTHORPE BUILDING PRODUCTS LTD
 MANTHORPE HOUSE
 BRITAIN DRIVE
 CODNOR GATE BUSINESS PARK
 RIPLEY
 DERBYSHIRE DE5 3ND

TEL: 01773 303 000
 FAX: 01773 303 300
 EMAIL: mbp.care@manthorpebp.co.uk
 WEB: www.manthorpebp.co.uk


DRN K.B. Date 18/10/19
 The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No
MBP 8343

Issue
A
 1 of 3

Stacked Underfloor Ventilator

CODE **G966**

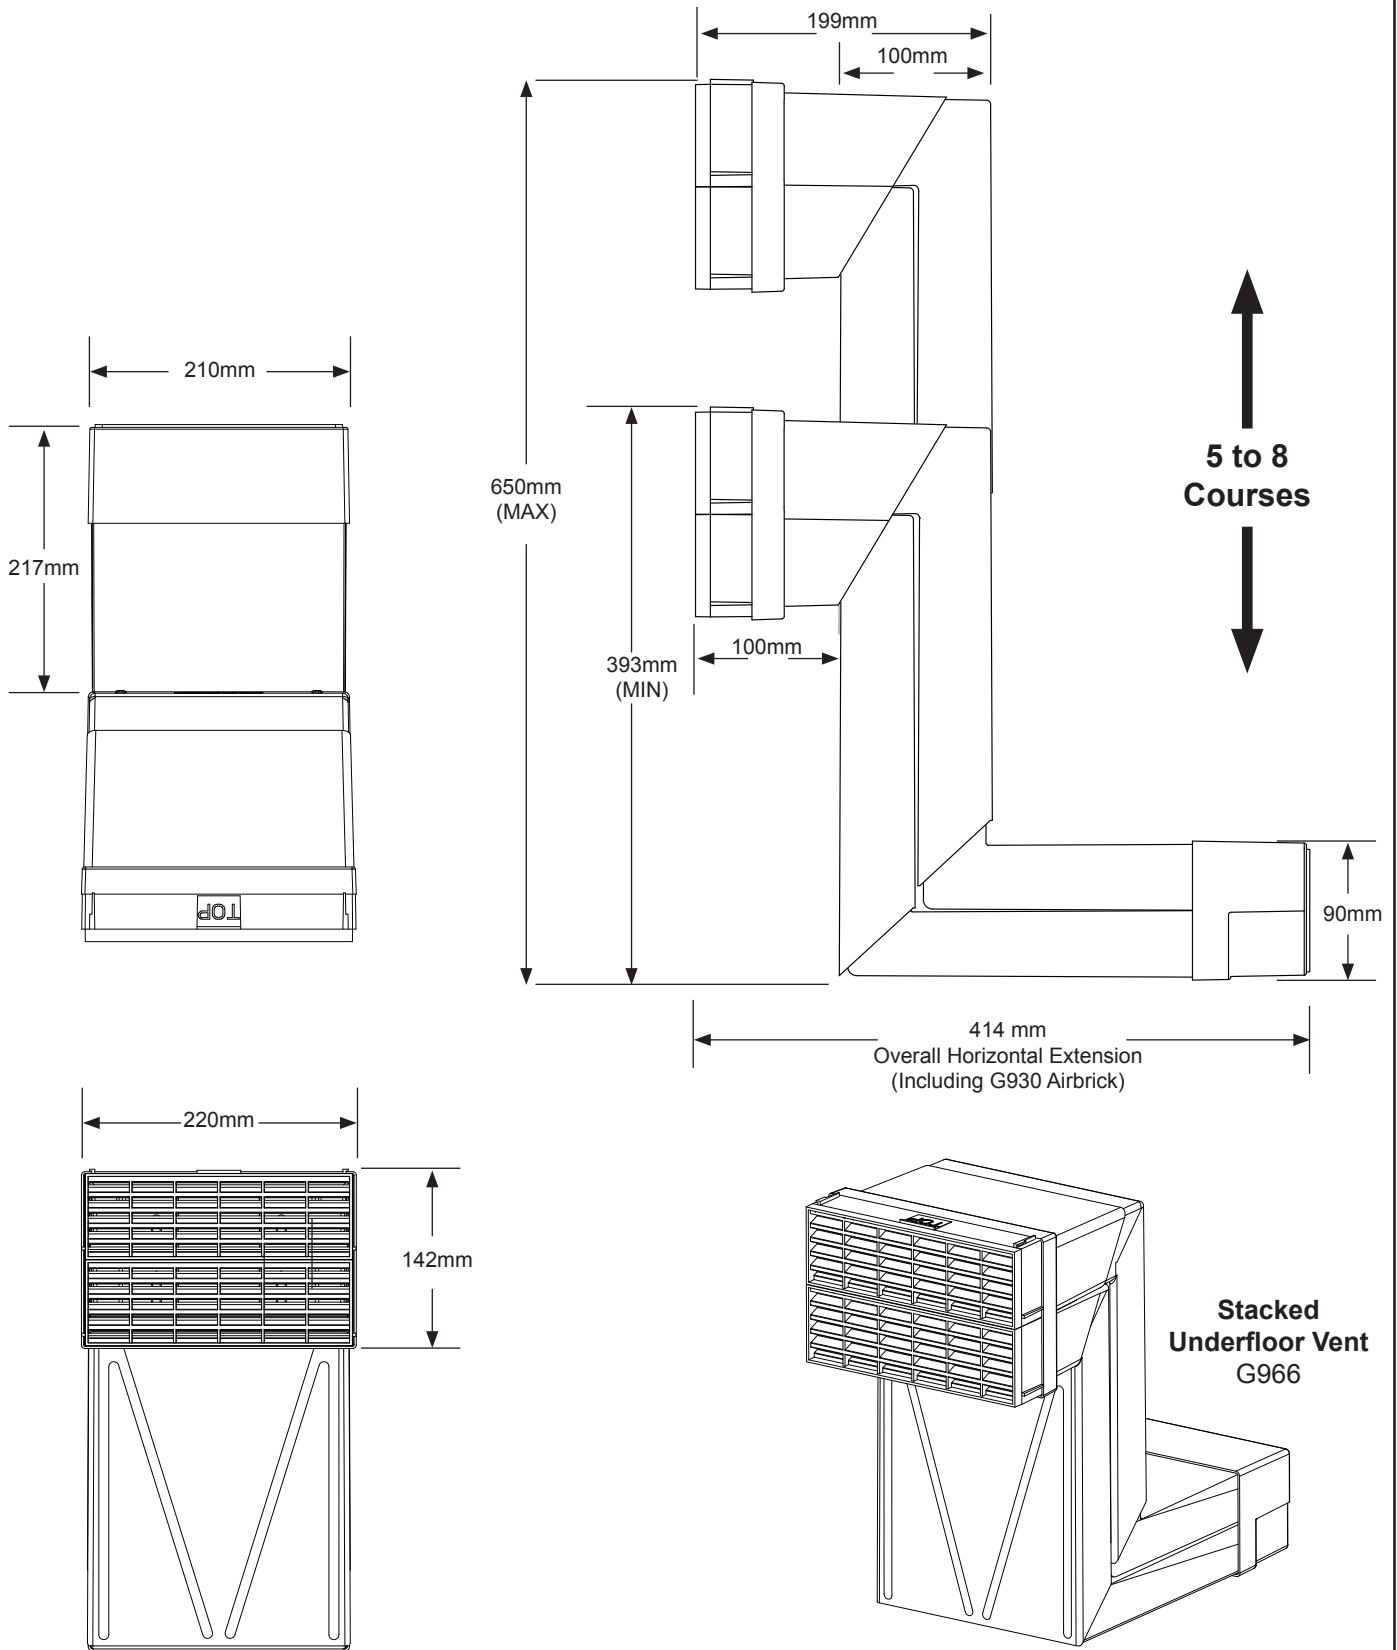

MANTHORPE BUILDING PRODUCTS LTD
 MANTHORPE HOUSE
 BRITAIN DRIVE
 CODNOR GATE BUSINESS PARK
 RIPLEY
 DERBYSHIRE DE5 3ND

TEL: 01773 303 000
 FAX: 01773 303 300
 EMAIL: mbp.care@manthorpebp.co.uk
 WEB: www.manthorpebp.co.uk

DRN K.B.

Date 18.10.19

DRG No

MBP 8343


Issue

A
 2 of 3

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

Stacked Underfloor Ventilator

CODE **G966**

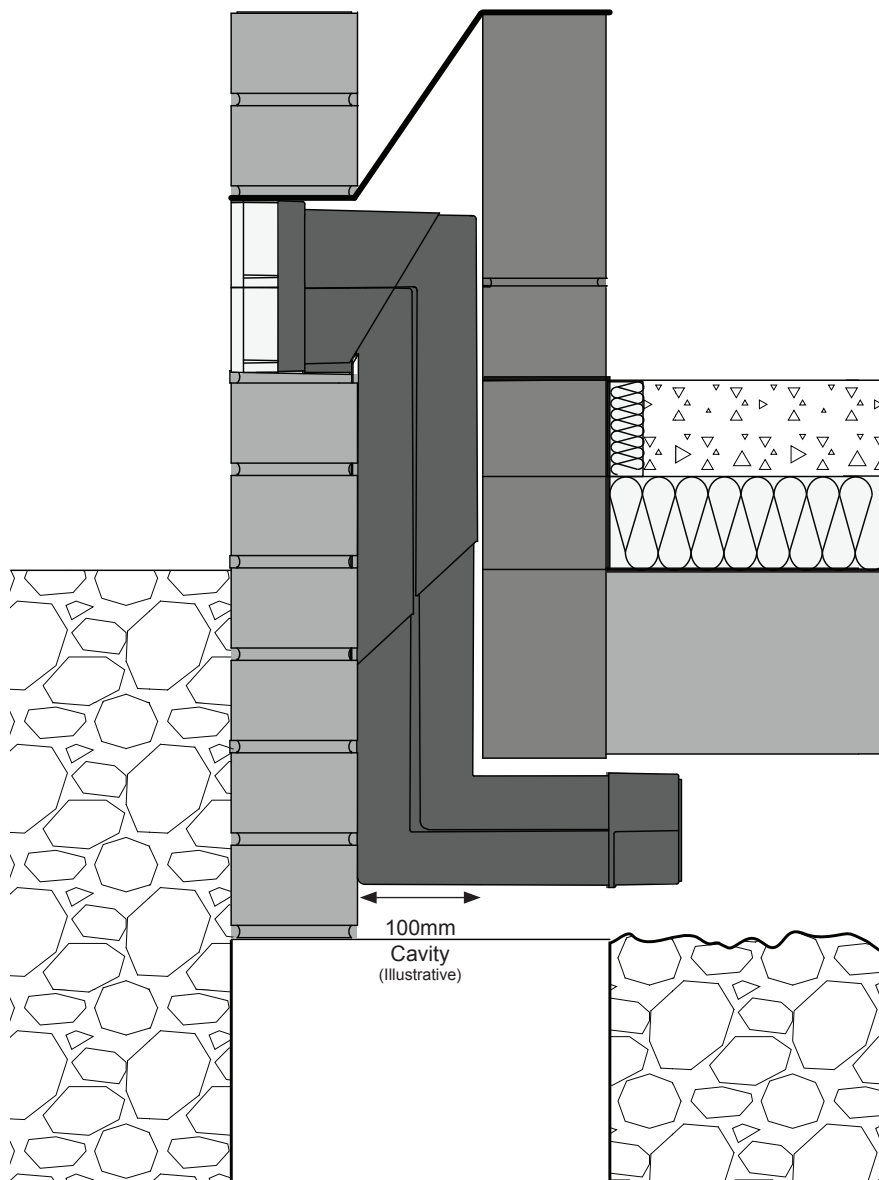

Fitting Instructions

The G966 Stacked Underfloor Ventilator should be installed during the normal course of bricklaying. The vent can be fitted as an assembled unit, or with the base component positioned first and the top added later when the bricklaying reaches the correct height. If fitted above the D.P.C then a suitable cavity tray should be fitted above the G966.

The G966 should be fitted in at least two opposing walls to create a through flow of ventilation into an underfloor void.

MANTHORPE BUILDING PRODUCTS LTD
 MANTHORPE HOUSE
 BRITAIN DRIVE
 CODNOR GATE BUSINESS PARK
 RIPLEY
 DERBYSHIRE DE5 3ND

TEL: 01773 303 000
 FAX: 01773 303 300
 EMAIL:
 mbp.care@manthorpebp.co.uk
 WEB
 www.manthorpebp.co.uk

DRN K.B. Date 18.10.19

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No

MBP 8343

Issue

A
 3 of 3